


CL 610 W / CL 610 S


Provisional picture

Annual Energy Consumption (AEC _{hood}) kWh/a	83
Energy Efficiency class	D
Fluid Dynamic Efficiency (FDE _{hood})	6,2
Fluid Dynamic Efficiency class	F
Light Efficiency (Lehood) lux/Watt	1
Lighting Efficiency class	G
Grease Filtering Efficiency (GFE _{hood}) %	70
Grease Filtering Efficiency class	D
Air flow (Qmin) m ³ /h	147
Air flow (Qmax) m ³ /h	200
Air flow (Qboost) m ³ /h	-
Noise (LwA) Min Speed dB	52
Noise (LwA) Max Speed dB	61
Noise (LwA) Boost Speed dB	-
Off mode Power (Po) W	0
Standby Power (Ps) W	-
Energy Efficiency Index (EEI _{hood})	99,9
Time increase actor (f)	1,8
Air flow at best efficiency point (Qbep) m ³ /h	119
Air pressure at best efficiency point (Pbep) Pa	179
Electric power input at best efficiency point (Wbep) W	95
Nominal power of the lighting system (WL) W	28
Average illumination of the lighting system on the cooking surface (Emiddle) Lux	41

FEATURES

- White and Stainless steel finishing
- Slider controls
- Conventional extraction
- 3 speeds
- Halogen bulb 28W
- Aluminum filters
- Motor Power (W) 110
- Voltage (V) 220-240 Frequency (Hz) 50
- Total Hood Power (W) 138
- Accessories :
 - Anti-return valve
 - Charcoal Filter (Optional)

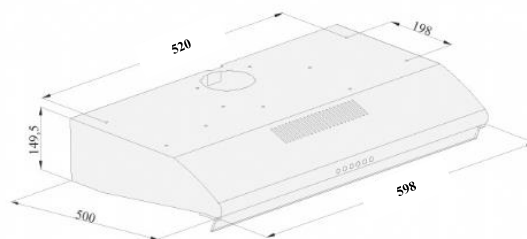

TKI DESCRIPTION	CODE	EAN
CAMPANA CL 610 W	40495270	8421152134115
CAMPANA CL 610 S	40495271	8421152134122