

## DBB 60/70/90 INOX

## CHARACTERISTICS

Illustration of DBB 90 Inox




Pyramidal hood with welded corners



Rectangular Push Buttons with operating pilot light



- Stainless Steel
- Welded corners – 32mm height
- Rectangular Push Buttons
- Operating Pilot Light
- Conventional extraction
- Max. Exhaust capacity Free Outlet: 500 m<sup>3</sup>/h
- 3 speeds
- 2 X 40W Incandescent lamps
- Double turbine motor
- Extraction\* vs. Noise Levels\*\*
  - 1st speed: 270m<sup>3</sup>/h – 53dBA
  - 2nd speed: 340m<sup>3</sup>/h – 61dBA
  - 3rd speed: 440m<sup>3</sup>/h – 63 dBA
- Suitable for kitchens of up to 27m<sup>2</sup>\*\*\*
- Aluminum filters
- Reduction 150/120mm included
- European plug included
- Recirculation mode (Optional) Set 1/M

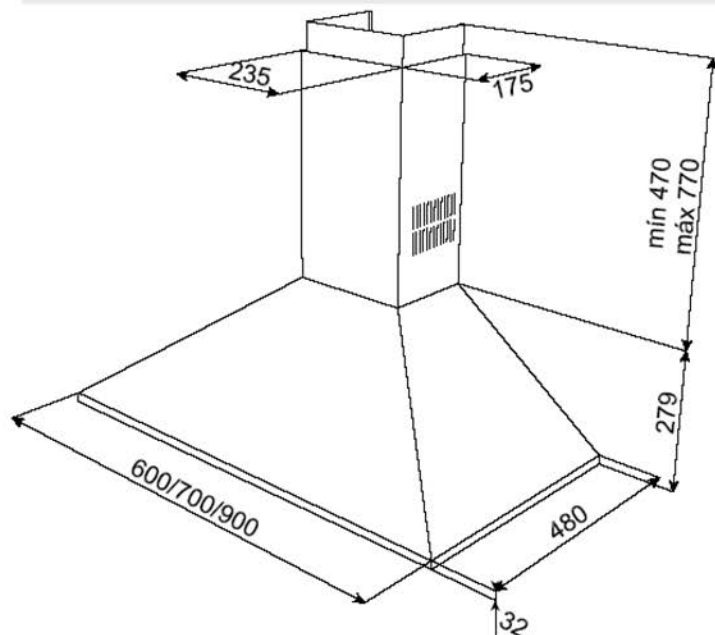

|           | Teka code | EAN13         |
|-----------|-----------|---------------|
| DBB 60 SS | 40420050  | 8421152120729 |
| DBB 70 SS | 40420055  | 8421152120736 |
| DBB 90 SS | 40420060  | 8421152120743 |

\* Extraction Capacity according UNE-EN-61591at 5Pa

\*\* Sound level measured according UNE-EN-60704-2-13

\*\*\*Recommendation based on 6 air renewals/day, kitchen with 2.5m height, and correct hood installation